

Handheld Micro Ohmmeters **RMO-H Series**

- Handheld – only 0,95 kg / 2.1 lbs
- Powerful – regulated current up to 300 A DC
- No rest time needed between the tests
- High-capacity Li-Po battery (2 types available):
 - 8800 mAh, 3,8 V DC (RMO-H1, -H2, -H3)
 - 4400 mAh, 7,6 V DC (RMO-H21, -H22, -H23)
- Measuring range 0,1 $\mu\Omega$ – 3000 m Ω
- Typical accuracy $\pm (0,1 \% \text{ rdg} + 0,1 \% \text{ FS})$
- Both Sides Grounded Measurement



Description

The RMO-H series – battery-operated and handheld micro-ohmmeters are unique solution for the contact resistance measurement of switchgears according to international standards (e.g. IEC 62271-100). RMO-H can be used for a number of applications where non-inductive resistance is checked, during factory inspections or testing in the high-induction field environments. The set is equipped with overcurrent protection.

RMO-H Series contains six models in total, divided into 2 sub-series depending on the test leads length requirement and the battery type:

- **RMO-H1, RMO-H2 and RMO-H3** models are intended for use with short type cables (e.g. 1,3 m). 1-cell Li-Po battery with 8800 mAh capacity provides output voltage up to 4,2 V DC.
- **RMO-H21, RMO-H22 and RMO-H23** models are ideal for applications where 5 m test leads (or longer) are required. The high output voltage (up to 8,4 V DC) is provided by 2-cell 4400 mAh Li-Po battery.


The current test is regulated and can be selected in a range of 1 A to maximum 300 A, depending of the maximum test current rating:

- **RMO-H1, RMO-H21** models - up to 100 A DC
- **RMO-H2, RMO-H22** models - up to 220 A DC
- **RMO-H3, RMO-H23** models - up to 300 A DC.

The high-capacity Li-Po battery enables generating a true DC ripple-free current. The main advantages of LI-Po technology over ultra-capacitor technology are:

- **No rest time needed between tests** since there is no ultra-capacitor charging.
- **Test current is regulated**, and it is not load-dependent like in case of ultra-capacitor. This means that user can select certain current value for the measurement (from 1 A to 300 A).

With the use of automatic test ramp (picture bellow), the test current is gradually increased before the measurement and decreased after the measurement is completed. This significantly decreases the influence of magnetic transients.

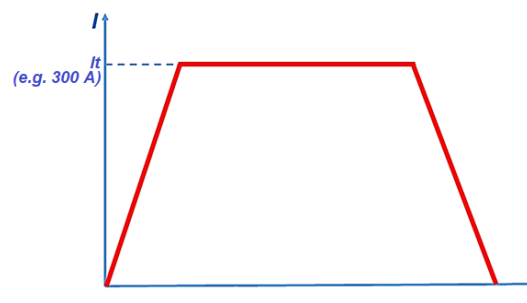

The RMO-H instrument can internally store up to 1000 measurements (time and date stamped). DV-Win software enables download of the results, creating and exporting test reports in different formats. Communication between the RMO-H and a PC is through Bluetooth communication.

Applications

Typical application is accurate low resistance measurement during manufacturing, commissioning and maintenance inspections on:


- High and medium voltage Switchgears and Circuit Breakers (as per IEC 62271-100 standards)
- High and medium voltage Disconnecting Switches (as per IEC 62271-100 standards)
- High-current Busbar joints
- Terminals of the conductors on HV power lines
- Bonding of Lighting conductors

RMO-H instruments are also ideal testing tools for quality control checking during the production process of high-voltage equipment and equipment used in railway and aircraft industry:

- Welding joints
- Cable splices and cable resistance
- OLTC contacts checking (off-line, not connected to transformer)
- Railway joints, lines and conductor rails
- Bonds and joints checking in aircraft manufacturing industry

Connecting RMO-H to a test object

The connection diagram of the RMO-H devices corresponds to Kelvin's (4-point) measurement principle. The measuring cables from the "Voltage Sense" sockets are attached as close as possible to the test object R_t , and in between the current feeding cables. That way, a resistance of both cables and clamps is excluded from the resistance measurement.

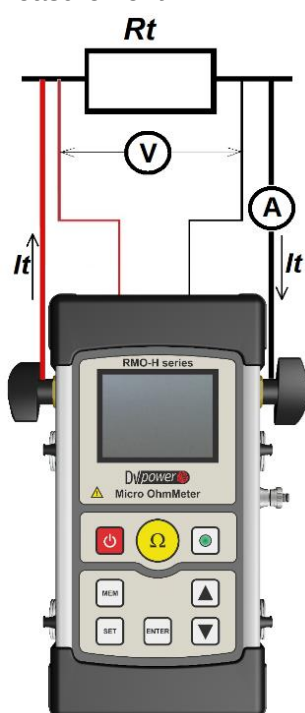

The combined current and voltage sense leads with TTA clamps are specially designed to fulfill the Kelvin's 4-point principle. This test leads design is particularly useful for field testing, when the least possible cabling is required.

For the contact resistance measurement of a medium voltage circuit breaker, as well as applications where remote control is required, it is convenient to use the cables with Kelvin probes (with trigger button).




When testing HV circuit breakers, switchgears, or connection on high power lines with RMO-H, one of the following two connection diagrams can be used:

a) Connection diagram – use of short cables

Since RMO-H is a handheld device, it can be used with short cables (e.g. 1,3 m and 3 m) even in case of live-tank circuit breakers, switchgears or power cable terminals testing.

A test operator can bring the device with himself in the bucket lift, connect test cables directly to each breaking chamber terminals (or some other measurement point) and take measurement (1-click to test principle).

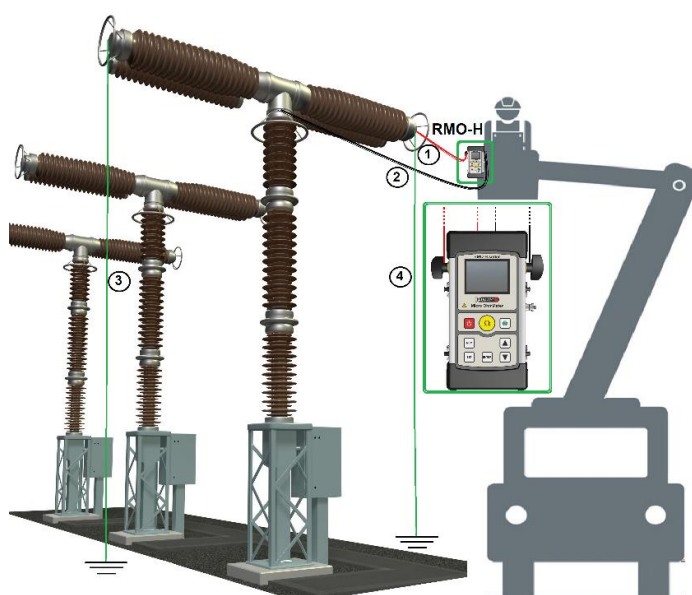


- 1 & 2 – Combined current and voltage sense cables
3 & 4 – Ground cables (the ground cable “4” is used for testing in Both Sides Grounded conditions)

b) Connection diagram – use of 5 m or longer cables

Internal testing procedures in some utilities or service companies may require the use of cables longer than 5 m for testing high voltage live-tank circuit breakers. This is a conventional (traditional) procedure for contact resistance measurement. Although long cables usually lead to very heavy current carrying cables, this is not

case for RMO-H21, RMO-H22 and RMO-H23 devices. This is achieved with high output voltage (up to 8,4 V DC).

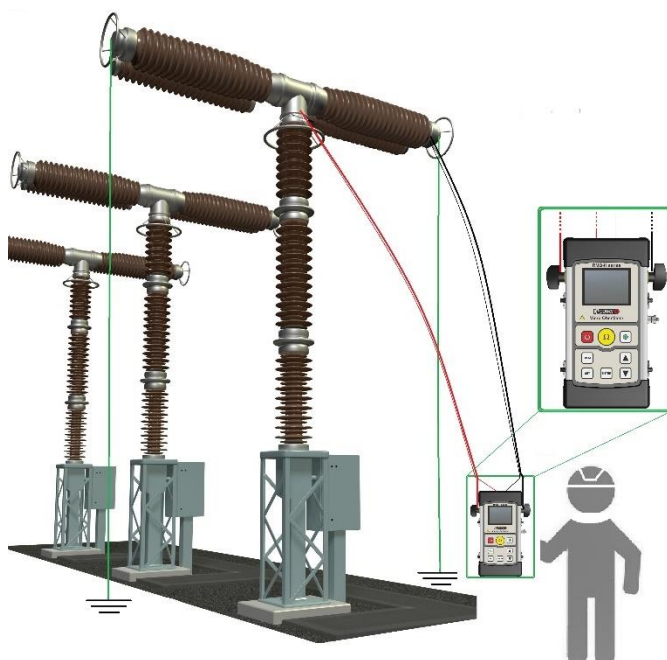

NOTE

RMO-H1, RMO-H2, RMO-H3 models DO NOT have interchangeable test leads with RMO-H21, RMO-H22, RMO-H23 models.

Both Sides Grounded testing

The RMO-H device provides a safe measurement of circuit breakers with both terminals grounded. The connection diagram is the same as for the one-side-grounded circuit breakers.

NOTE

This type of measurement could be less accurate compared to the measurement in one-side-grounding conditions, because of some amount of the current that can flow through groundings.

Benefits and features

RMO-H is a handheld micro-ohmmeter ideal for a field and factory testing, with a very user-friendly interface (1-click to test). This is achieved with an intuitive keyboard and menu design.

The high-capacity Li-Po battery enables multiple measurements in the field/factory. This technology proved itself as much efficient over the ultra-capacitor technology (table below).

RMO-H (Li-Po technology)	Micro ohmmeters with ultra-capacitor
No rest time needed between consecutive tests.	Users need to wait for ultra-capacitor to charge between the tests.
Precise value of the test current value can be selected in range from 1 A to I_{max} (e.g. 1 – 300 A for RMO-H3)	It is not possible to select precise test current value since it depends on the ultra-capacitor's voltage and load resistance.
Test current is stable during measurement. It is generated by an automatic test ramp.	Test current is not stable during the measurement; it is decreasing due to discharging of the ultra-capacitor.

RMO-H devices can store up to 10000 test results to internal memory. The results can be transferred to PC with use of Bluetooth communication.

DV-Win software

*included in the purchase price

DV-Win software for the RMO-H device is an application set of tools based on the Windows operating system. It enables communication between a standard PC and the RMO-H device over the Bluetooth connection. The main features of the DV-Win software are:

- Download of the test results to a PC
- Saving the test results in different formats
- Test reports (fully customized)


RMO-H1, RMO-H2 and RMO-H3 models use short test leads (e.g. 1,3 m and 3 m). Since an operator takes the device with himself and makes the measurements, use of longer cables is not required.

For applications where use of test leads longer than 5 m is mandatory or preferable, RMO-H21, RMO-H22 and RMO-H23 models are the ideal solution, due to their high output voltage.

The RMO-H instruments have a very high typical accuracy $\pm (0,1\% \text{ rdg} + 0,1\% \text{ FS})$, with the best resolution of $0,1 \mu\Omega$.

With fully charged battery, RMO-H1 can perform over 800 tests, while RMO-H21 can perform over 400 tests.

The additional feature is the pass/fail criteria implemented through the **R_{max}** function. When this function is turned ON, the RMO-H device displays information if the measured resistance is higher than the set **R_{max}** resistance value.

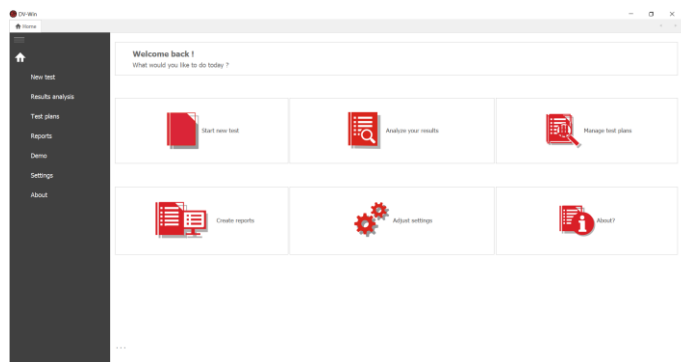

Technical data

Battery

- Type: Li-Po (User-replaceable)
 - 1-cell, 8800 mAh (RMO-H1, -H2, -H3)
 - 2-cells 4400mAh (RMO-H21, -H22, -H23)
- Recharge time: 2 hours

AC Adapter

- Input voltage 90 – 264 V AC, 50/60 Hz
- Output voltage 12 V DC
- Output current 3 A

Output data

- Test current range:
 - 1 – 100 A DC (RMO-H1, -H21)
 - 1 – 220 A DC (RMO-H2, -H22)
 - 1 – 300 A DC (RMO-H3, -H23)
- *Test current is regulated and user-selectable*
- Maximum DC output voltage @Imax:
 - 4,2 V (RMO-H1, -H2, -H3)
 - 8,4 V (RMO-H21, -H22, -H23)

Measurement

- Resistance range 0,1 $\mu\Omega$ – 3000 m Ω
- Resolution

0,1 – 999,9 $\mu\Omega$	0,1 $\mu\Omega$
1,000 – 9,999 m Ω	0,001 m Ω
10,00 – 99,99 m Ω	0,01 m Ω
100,0 – 999,9 m Ω	0,1 m Ω
1000 – 3000 m Ω	1 m Ω

- Typical accuracy*
 - $\pm (0,1 \% \text{ rdg} + 0,1 \% \text{ FS})$ - up to 1 Ω range
 - $\pm (0,25 \% \text{ rdg} + 0,25 \% \text{ FS})$ - from 1 Ω to 3 Ω

**Accuracy is valid under the maximal test current per the range being used (as defined in the RMO-H's Manual Section 3.6)*

Memory

- Internal: 32 GB SD Card
- RMO-H can store up to 10000 measurements*
 - *Time and date stamped, with resistance, measured and selected test current and voltage drop values saved.*

Interface

- Bluetooth communication

Real time clock

- Precision: ± 5 seconds per month
- Calendar: 100 years with a leap year detection
- Time retention: 10+ years (battery removed)

Environment conditions

- Operating temperature:
 - 10 $^{\circ}\text{C}$ - +55 $^{\circ}\text{C}$ / +14 $^{\circ}\text{F}$ - +131 $^{\circ}\text{F}$
- Storage & transportation temperature:
 - 40 $^{\circ}\text{C}$ - +70 $^{\circ}\text{C}$ / -40 $^{\circ}\text{F}$ - +158 $^{\circ}\text{F}$
- Humidity 5 % - 95 % relative humidity, non-condensing

Encapsulation

- IP54

Dimensions and Weight

- Dimensions (L x W x D):
 - 226 mm x 116 mm x 50 mm
 - 8.9 in x 4.5 in x 1.9 in
- Weight: 0,95 kg / 2.1 lbs

Warranty

- 3 years + additional 1 (one) year

Applicable Standards

- Installation/overvoltage: category II
- Pollution: degree 2
- Environmental tests – Shock: IEC 60068-2-27
- Environmental tests – Vibrations: IEC 60068-2-6
- Safety: Directive 2014/35/EU (CE conform) Standard EN61010-1 (LVD Directive)
- EMC: Directive 2014/30/EU (CE conform) Standard EN 61326-1:2006

All specifications herein are valid at the rated battery voltage (or higher output voltage), ambient temperature of + 25 $^{\circ}\text{C}$ and recommended accessories. Specifications are subject to change without notice.

Accessories



Current and sense cables 2 x 1,3 m with TTA clamps for RMO-H1, RMO-H2 and RMO-H3 devices

Current and sense cables 5 m with TTA clamps for RMO-H21, RMO-H22 and RMO-H23 devices



Power supply adapter and a car charger



Current cables and Sense cable with Kelvin probes

Current cables with battery clamps & Sense cables with alligator clamps



Plastic transport case for the device and accessories

RMO-H models selection

RMO-H1, RMO-H2 and RMO-H3



Test current rating:

- RMO-H1 (from 1 A to 100 A DC)
- RMO-H2 (from 1 A to 220 A DC)
- RMO-H3 (from 1 A to 300 A DC)

Battery type: Li-Po, 1 cell, 8800 mAh

Output voltage: up to 4,2 V DC

Included accessories:

- USB with DV-Win PC software
- Ground (PE) cable
- Carrying belts
- Plastic transport case – small size

Standard accessories:

- 2 x 1,3 m current & 2 x 1,3 m sense leads with TTA clamps

RMO-H21, RMO-H22 and RMO-H23



Test current rating:

- RMO-H21 (from 1 A to 100 A DC)
- RMO-H22 (from 1 A to 220 A DC)
- RMO-H23 (from 1 A to 300 A DC)

Battery type: Li-Po, 2 cells, 4400 mAh

Output voltage: up to 8,4 V DC

Included accessories:

- USB with DV-Win PC software
- Ground (PE) cable
- Carrying belts
- Plastic transport case – medium size

Standard accessories:

- 2 x 5 m combined current & sense leads with TTA clamps

Order info

- RMO-H1, RMO-H2 and RMO-H3 devices

Instrument with included accessories	Article No
Handheld Micro Ohmmeter RMO-H1	RMOH100-N-00
Handheld Micro Ohmmeter RMO-H2	RMOH220-N-00
Handheld Micro Ohmmeter RMO-H3	RMOH300-N-00

Included accessories
USB with DV-Win PC software
Ground (PE) cable
Carrying belts
Plastic transport case – medium size

Standard accessories	Article No
Current and sense cables 2 x 1,3 m with TTA clamps (up to 220 A rated) <i>*for RMO-H1 & RMO-H2</i>	CS2-1Z3-10CLWC
Current and sense cables 2 x 1,3 m with TTA clamps (300 A rated) <i>*for RMO-H3</i>	CS2-1Z3-25CLWC
Power supply adapter 3 A EU	PWR-ADP3A-EU

Optional accessories	Article No
Current and sense cables 2 x 1,3 m with Kelvin probes (up to 200 A rated) <i>*for RMO-H1 & RMO-H2</i>	CS2-1Z3-10CLKP
Current and sense cables 2 x 1,3 m with Kelvin probes (250 A rated) <i>*for RMO-H3</i>	CS2-1Z3-16CLKP
Current and sense cables 2 x 1,3 m with Kelvin probes (300 A rated) <i>*for RMO-H3</i>	CS2-1Z3-25CLKP
Current and sense cables 1,3 m (red) and 3 m (black) with TTA clamps (100 A rated)	CS-1Z33-10CLWC
Current and sense cables 1,3 m (red) and 3 m (black) with TTA clamps (220 A rated)	CS-1Z33-16CLWC
Current and sense cables 1,3 m (red) and 3 m (black) with TTA clamps (250 A rated)	CS-1Z33-25CLWC
Current and sense cables 1,3 m (red) and 5 m (black) with TTA clamps (100 A rated)	CS-1Z35-10CLWC
Current and sense cables 1,3 m (red) and 5 m (black) with TTA clamps (200 A rated)	CS-1Z35-16CLWC
Current and sense cables 1,3 m (red) and 5 m (black) with TTA clamps (250 A rated)	CS-1Z35-25CLWC
Current cables 2 x 1,3 m with TTA clamps (270 A rated) <i>*for RMO-H3</i>	C2-1Z3-16CLWC
Sense cables 2 x 1,3 m with alligator clamps (A2)	S2-1Z3-02BPA2
Current cables 1,3 m and 3 m with TTA clamps (220 A rated) <i>*for RMO-H2 & RMO-H3</i>	C-1Z33-16CLB1
Sense cables 1,3 m and 3 m with alligator clamps (A2)	S-1Z33-02BPA2
Current cables 2 x 1,3 m with battery clamps (300 A rated) <i>*for RMO-H3</i>	C2-1Z3-25CLB1
Current cables 1,3 m and 3 m with battery clamps (100 A rated)	C-1Z33-10CLB1
Current cables 1,3 m and 3 m with battery clamps (220 A rated)	C-1Z33-16CLB1
Current cables 1,3 m and 3 m with battery clamps (250 A rated)	C-1Z33-25CLB1
Sense cables 1,3 m and 3 m with alligator clamps (A2)	S-1Z33-02BPA2
Current cables 1,3 m and 5 m with battery clamps (100 A rated)	C-1Z35-10CLB1
Current cables 1,3 m and 5 m with battery clamps (200 A rated)	C-1Z35-10CLB1
Current cables 1,3 m and 5 m with battery clamps (250 A rated)	C-1Z35-10CLB1
Sense cables 1,3 m and 5 m with alligator clamps (A2)	S-1Z35-02BPA2
Current and sense cables 2 x 5 m with sliding arm Kelvin's clamps (220 A rated)	CS2-05-25CLSK
Test shunt 240 $\mu\Omega$ (250 A/60 mV)	SHUNT-240-MK
Test shunt 1 m Ω (150 A/150 mV)	SHUNT-150-MK
Power supply adapter (car charger)	PWR-ADP3-CC0

- **RMO-H21, RMO-H22 and RMO-H23 devices**

Instrument with included accessories	Article No
Handheld Micro Ohmmeter RMO-H21	RMOH100-N2-0
Handheld Micro Ohmmeter RMO-H22	RMOH220-N2-0
Handheld Micro Ohmmeter RMO-H23	RMOH300-N2-0

Included accessories
USB with DV-Win PC software
Ground (PE) cable
Carrying belts
Plastic transport case – medium size

Standard accessories	Article No
Current and sense cables 5 m with TTA clamps (100 A rated) <i>*for RMO-H21</i>	CS-05-06CLWC
Current and sense cables 5 m with TTA clamps (220 A rated) <i>*for RMO-H22</i>	CS-05-16CLWC
Current and sense cables 5 m with TTA clamps (300 A rated) <i>*for RMO-H23</i>	CS-05-25CLWC
Power supply adapter 3 A EU	PWR-ADP3A-EU

Optional accessories	Article No
Current and sense cables 2 x 5 m with Kelvin probes (220 A rated)	CS2-05-16CLKP
Current and sense cables 2 x 5 m with Kelvin probes (300 A rated)	CS2-05-25CLKP
Current and sense cables 10 m with TTA clamps (100 A rated)	CS-10-10CLWC
Current and sense cables 10 m with TTA clamps (220 A rated)	CS-10-25CLWC
Current and sense cables 15 m with TTA clamps (100 A rated)	CS-15-16CLWC
Current cables 2 x 5 m with battery clamps (100 A rated)	C2-05-06CLB1
Current cables 2 x 5 m with battery clamps (220 A rated)	C2-05-16CLB1
Current cables 2 x 5 m with battery clamps (300 A rated)	C2-05-25CLB1
Current cables 2 x 10 m with battery clamps (100 A rated)	C2-10-10CLB1
Current cables 2 x 10 m with battery clamps (220 A rated)	C2-10-25CLB1
Current cables 2 x 15 m with battery clamps (100 A rated)	C2-15-16CLB1
Sense cables 2 x 10 m with alligator clamps (A2)	S2-10-02BPA2
Sense cables 2 x 15 m with alligator clamps (A2)	S2-15-02BPA2
Cable bag	CABLE-BAG-00
Test shunt 240 $\mu\Omega$ (250 A/60 mV)	SHUNT-240-MK
Test shunt 1 m Ω (150 A/150 mV)	SHUNT-150-MK
Power supply adapter (car charger)	PWR-ADP3-CC0

NOTE

RMO-H21, RMO-H22, RMO-H23 devices DO NOT HAVE interchangeable test leads with RMO-H1, RMO-H2, RMO-H3 models. Any use of non-suitable test leads (not mentioned in accessory list above) will be considered as improper device use and can lead even to the device malfunctioning. Cables different then specified above could be assured upon request